

The Gripple Barbed takes the hassle out of joining and knotting barbed wire creating a secure installation.

## FEATURES / BENEFITS

- Eliminates tying and knotting wires, reducing installation time
- Join and tension in one
- Easily re-tensioned year-after-year
- Ideal for use on high tensile and mild steel wire
- High grade ceramic roller for corrosion resistance




## SPECIFICATION


Product	Wire Type	Wire Range	Standard Wire Gauge	Maximum Working Load
Barbed	Mild steel barbed	2 x 2.00 mm - 2 x 2.50 mm	2 x 14 SWG - 2 x 12½ SWG	150 kg

## INSTALLATION


1.

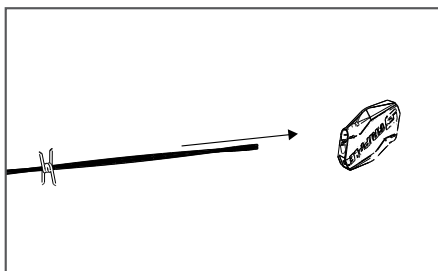

2.

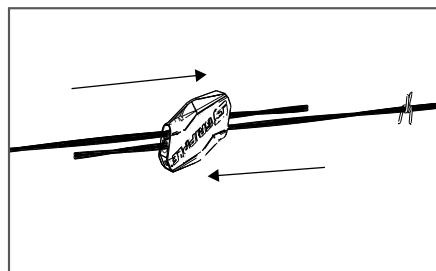

3.

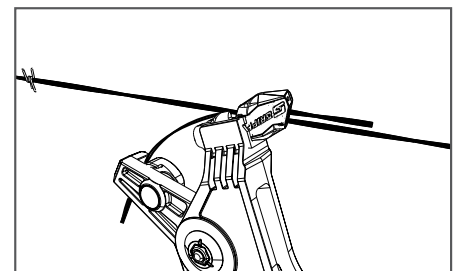

## TIPS

- Remove sufficient barbs prior to installation
- Apply and re-apply tension with a tensioning tool
- Trim excess wire with Wire Cutters, leave at least 75 mm tail wire to enable re-tensioning



PI-BARBED-ENG

[www.gripple.com](http://www.gripple.com)

Gripple's policy is one of continuous development and innovation. We therefore reserve the right to alter specifications, etc. without notice.

Gripple Ltd | The Old West Gun Works | Savile Street East | Sheffield S4 7UQ  
Tel 0800 018 4264 Fax 0114 275 1155 email [info@gripple.com](mailto:info@gripple.com)